




## Improve arrival conditions—unitize your loads with the CM-2 automatic compression strapping system

**T**he CM-2 compression strapping machine is the economical solution for low volume applications. It can be equipped with a single MCD 500 strapping head for unitizing corrugated sheet or an MHT-80 strapping head for heavier-duty general-purpose loads (e.g., unitized wheel castings) that require higher tension. Both systems provide consistent, reliable, low-maintenance operation to minimize downtime and improve your bottom line.

### **Options:**

- Automatic load positioning controls (conveyors required)
- Manual controls
- Pallet void feeding attachment (PVFA)
- Entry/discharge conveyors
- Load centering device
- External turntable conveyor

# Signode™ CM-2 automatic compression strapping system

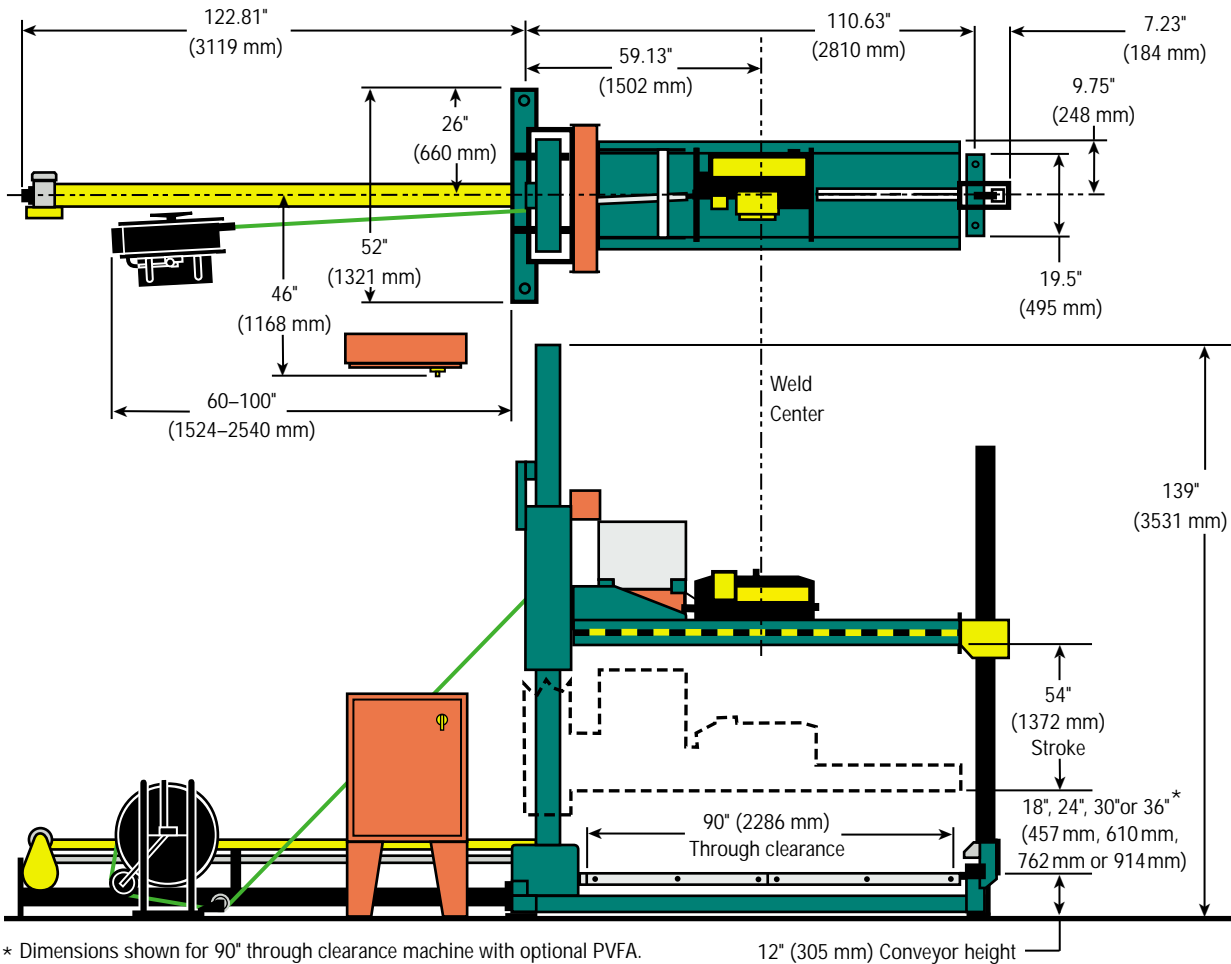

## Specifications:

### Platen Height Openings:

18"–72" (457 mm–1829 mm)  
 24"–78" (610 mm–1981 mm)  
 30"–84" (762 mm–2134 mm)  
 36"–90" (914 mm–2286 mm)

Through clearance: 77", 90", or 102"  
 (1956 mm, 2286 mm, or 2591 mm)

Platen stroke: 54" (1372 mm) standard

Operation: Automatic, manual or OEM

Strapping head: MCD 500 strapping head for Contrax® or Tenax® plastic strapping, optional MHT-80 strapping head for High-Strength Tenax™ polyester strapping

### Strapping:

HD 729 Contrax polypropylene strapping  
 1716LC or 1718LC Tenax polyester strapping  
 2030 or 2040 High-Strength Tenax polyester strapping with optional MHT-80 strapping head

### Platen design:

Cantilevered, 27" (686 mm) wide

### Compression:

400 lbs. to 1,100 lbs.  
 (181 kg to 499 kg) or  
 1,100 lbs. to 2,100 lbs.  
 (499 kg to 952 kg)

### Conveyor system compatibility:

Designed for 12" (305 mm) high standard conveyor

### Electrical:

230/460 volt, 3 phase, 60Hz  
 (other options available)

### Pneumatic supply:

3.5 scfm @ 90-100 psi

### Shipping weight:

3,150 lbs.

## SIGNODE INDUSTRIAL GROUP

3660 West Lake Avenue Glenview,  
 Illinois 60025  
 1-800-531-1022